

CRYSTAL **2P**




MULTIFUNCION SHOWER CUBICLE 120X100 - 1 SLIDING DOOR + 1 FIXED PANEL IN LINE + 1 SIDE PANEL


[illegible]



CRYSTAL 2P CHROME/BLACK

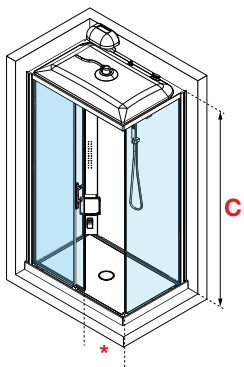

S Left

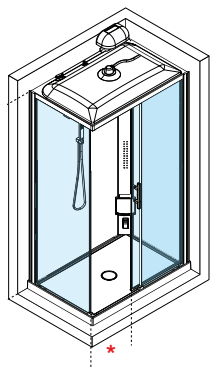

D Right



CRYSTAL R CHROME/BLACK




CRYSTAL A CHROME/WHITE PRINTING




CRYSTAL A CHROME/BLACK

CRYSTAL | FINISHES

STRUCTURE FINISHES



Silver
code B



Chrome
code K


BACK WALL PANELS FINISHES



White
code A



Black
code H



White printing
code 66

GLASS FINISHES



Clear
thickness 6 mm

CRYSTAL | FUNCTIONS AND EQUIPMENT (available depending on the model)



Manual or Thermostatic mixer and Hand shower



Dome with Shower head



Body hydromassage



Soap holder




Foldaway seat



Steam generator + Steam and aroma dispenser



CRYSTAL 2P CHROME/WHITE



Shower head


- ❶ for shower cubicle with dome
- ❷ for shower cubicle without dome



Glass/chrome shelf





Glass back walls with Crystal Clear treatment



Foldaway seat




CRYSTAL

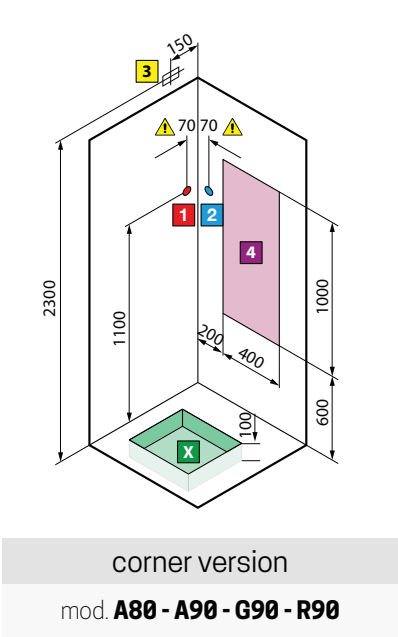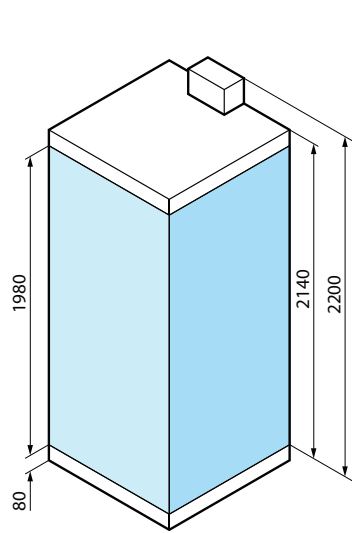


corner version

mod. **A80 - A90 - G90 - R90**

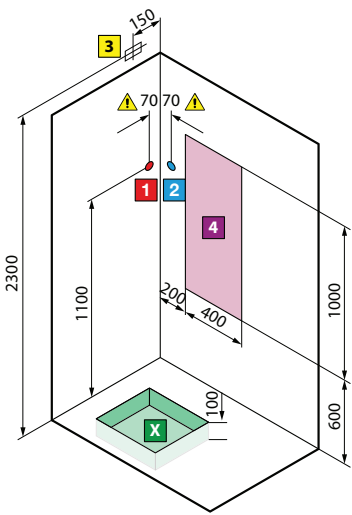


left version

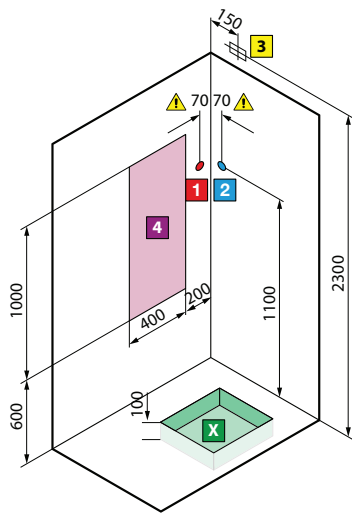


right version

mod. **A90x70 - A100x70 - A100x80 - 2P120x80**





model	A ± 2	B ± 2	C	D	E	F
A80	800	800	100	500	450	225
A90	900	900	150	500	450	275
G90	900	900	150	500	450	275






model	A ± 2	B ± 2	C	D	E	F
R90	900	900	150	500	450	275

S VERSION LEFT

D VERSION RIGHT



model	A ± 2	B ± 2	C	D	E	F
A90x70	900	700	150	500	400	200
A100x70	1000	700	200	500	400	200
A100x80	1000	800	200	500	450	220
2P120x80	1200	800	200	600	450	220





Visual inspection
not possible




HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W


WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

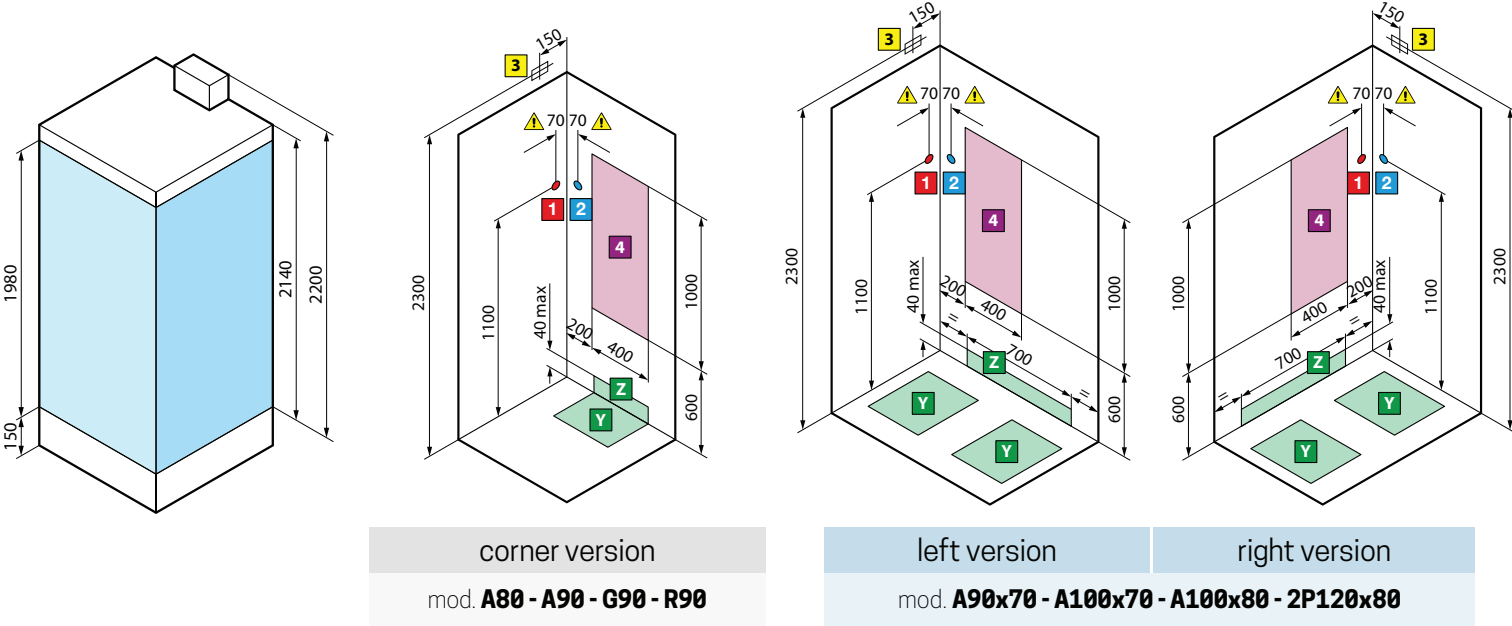


model	A ± 4	B ± 4	C	D	E
A80	800	800	200	400	300
A90	900	900	200	500	300
G90	900	900	200	500	300



model	A ± 4	B ± 4	C	D	E
R90	900	900	200	500	300

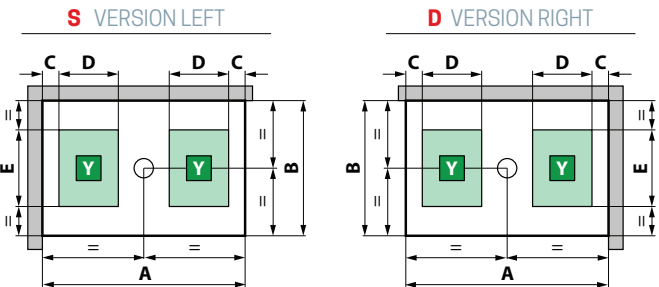

model	A ± 4	B ± 4	C	D	E
A90x70	900	700	50	250	350
A100x70	1000	700	100	250	350
A100x80	1000	800	100	250	450
2P120x80	1200	800	100	350	450

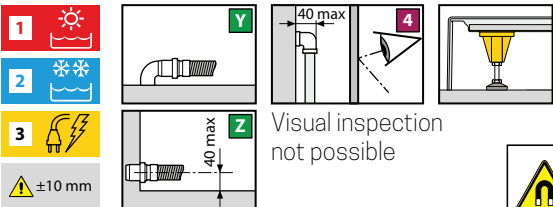

Visual inspection
not possible



HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.