

CRYSTAL **A**

Dimensions				Code	Installation		Mixer		Hydro-massage	Glass	Select the finishing		Background colour			
											Silver finish	Chrome finish	White panel	Black panel	White printing panel	
Dimensions (cm)	Shower tray (cm)	Total height (cm)	Access (cm)		D	S	M	T		1	B	K	A	H	66	
		C	*			Right	Left	Manual	Thermo-static		Clear	Silver	Chrome	White	Black	White printing

STANDARD

					D	S	M-	T-		1	B	K	A	H	66
80 X 80	8	206	40	HC2A80	-	-			-						
80 X 80	15	213	40	HC2A89	-	-			-						
90 X 90	8	206	47	HC2A90	-	-			-						
90 X 90	15	213	47	HC2A99	-	-			-						
90 X 70	8	206	40	HC2A7090					-						
90 X 70	15	213	40	HC2A7099					-						
100 X 70	8	206	44	HC2A107					-						
100 X 70	15	213	44	HC2A197					-						
100 X 80	8	206	47	HC2A100					-						
100 X 80	15	213	47	HC2A109					-						

HYDROMASSAGE

					D	S	M	T	1-	1	B	K	A	H	66
80 X 80	8	220	40	HC2A80	-	-									
80 X 80	15	227	40	HC2A89	-	-									
90 X 90	8	220	47	HC2A90	-	-									
90 X 90	15	227	47	HC2A99	-	-									
90 X 70	8	220	40	HC2A7090											
90 X 70	15	227	40	HC2A7099											
100 X 70	8	220	44	HC2A107											
100 X 70	15	227	44	HC2A197											
100 X 80	8	220	47	HC2A100											
100 X 80	15	227	47	HC2A109											

HYDRO WITH DOME

					D	S	M	T	1F-	1	B	K	A	H	66
80 X 80	8	222	40	HC2A80	-	-									
80 X 80	15	229	40	HC2A89	-	-									
90 X 90	8	222	47	HC2A90	-	-									
90 X 90	15	229	47	HC2A99	-	-									
90 X 70	8	222	40	HC2A7090											
90 X 70	15	229	40	HC2A7099											
100 X 70	8	222	44	HC2A107											
100 X 70	15	229	44	HC2A197											
100 X 80	8	222	47	HC2A100											
100 X 80	15	229	47	HC2A109											

HAMMAM



					D	S	M	T	1N-	1	B	K	A	H	66
80 X 80	8	228	40	HC2A80	-	-									
80 X 80	15	235	40	HC2A89	-	-									
90 X 90	8	228	47	HC2A90	-	-									
90 X 90	15	235	47	HC2A99	-	-									
90 X 70	8	228	40	HC2A7090											
90 X 70	15	235	40	HC2A7099											
100 X 70	8	228	44	HC2A107											
100 X 70	15	235	44	HC2A197											
100 X 80	8	228	47	HC2A100											
100 X 80	15	235	47	HC2A109											




CRYSTAL A CHROME/WHITE

80x80 | 90x90

90x70 | 100x70 | 100x80

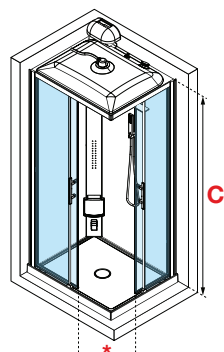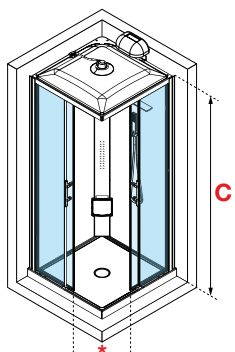


S Left

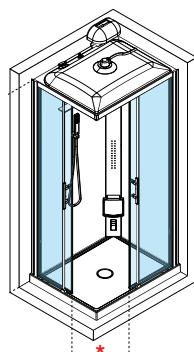

D Right



CRYSTAL 2P CHROME/WHITE



Shower head


- ❶ for shower cubicle with dome
- ❷ for shower cubicle without dome



Glass/chrome shelf



Glass back walls with Crystal Clear treatment




Foldaway seat



CRYSTAL



CRYSTAL 2P CHROME/WHITE



Shower head


- ❶ for shower cubicle with dome
- ❷ for shower cubicle without dome



Glass/chrome shelf





Glass back walls with Crystal Clear treatment



Foldaway seat


CRYSTAL



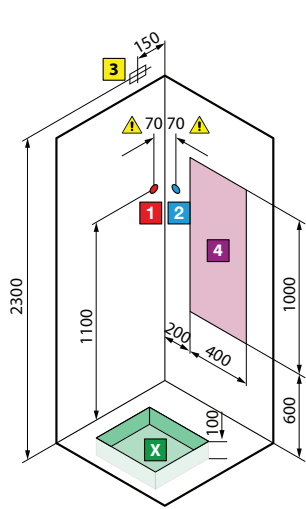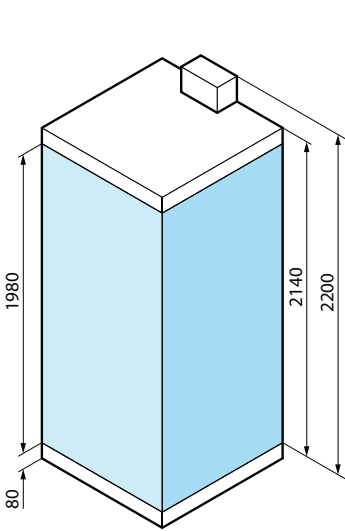


corner version

mod. **A80 - A90 - G90 - R90**

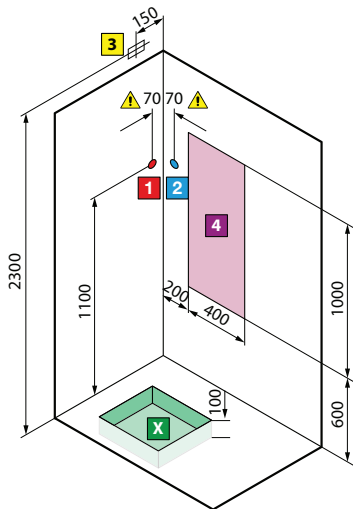


left version

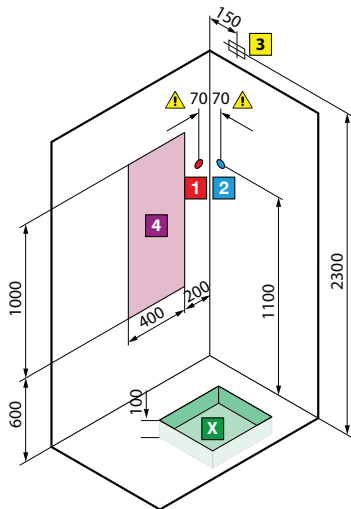


right version

mod. **A90x70 - A100x70 - A100x80 - 2P120x80**





model	A ± 2	B ± 2	C	D	E	F
A80	800	800	100	500	450	225
A90	900	900	150	500	450	275
G90	900	900	150	500	450	275







model	A ± 2	B ± 2	C	D	E	F
R90	900	900	150	500	450	275

S VERSION LEFT

D VERSION RIGHT



model	A ± 2	B ± 2	C	D	E	F
A90x70	900	700	150	500	400	200
A100x70	1000	700	200	500	400	200
A100x80	1000	800	200	500	450	220
2P120x80	1200	800	200	600	450	220





Visual inspection
not possible




HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W


WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

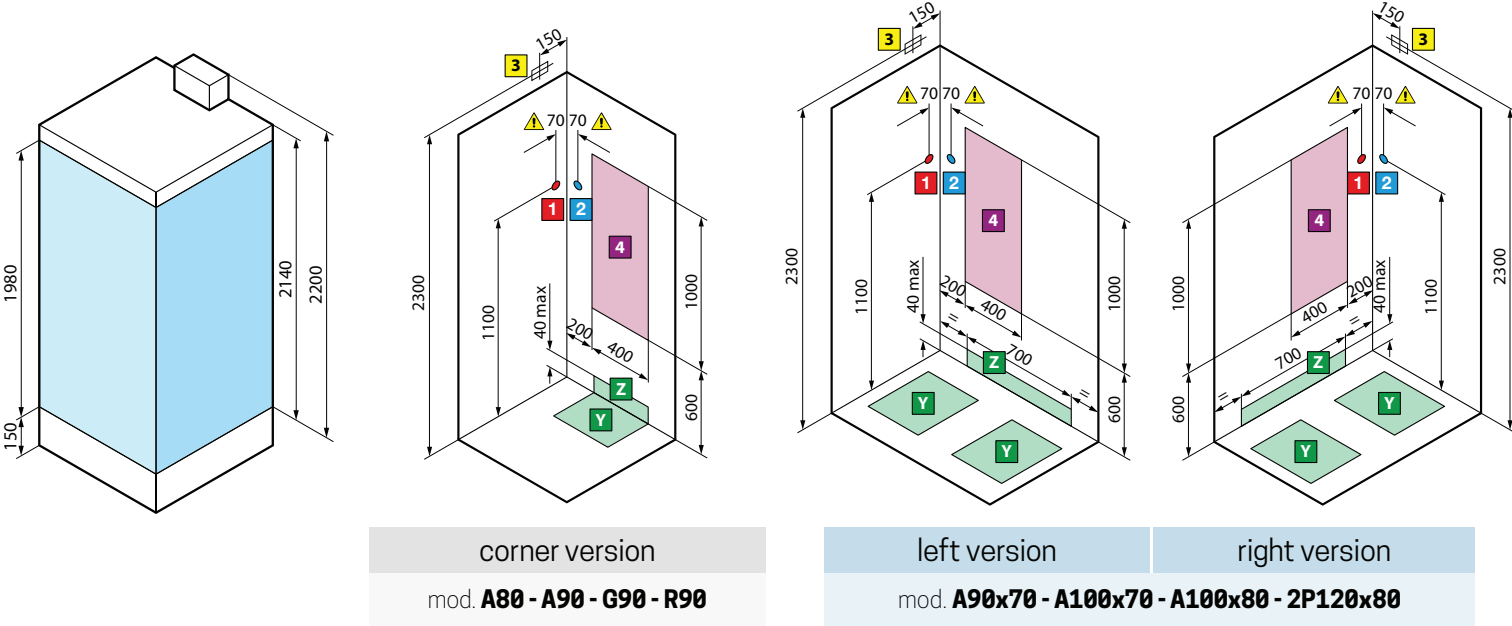


model	A ± 4	B ± 4	C	D	E
A80	800	800	200	400	300
A90	900	900	200	500	300
G90	900	900	200	500	300



model	A ± 4	B ± 4	C	D	E
R90	900	900	200	500	300

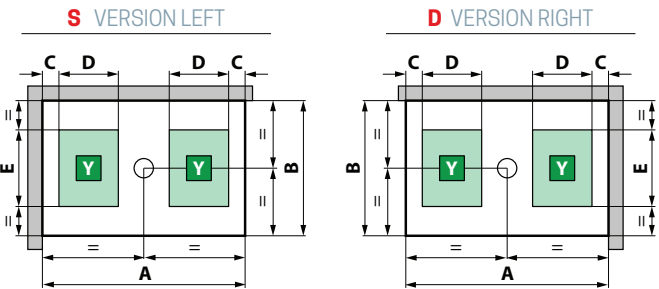

model	A ± 4	B ± 4	C	D	E
A90x70	900	700	50	250	350
A100x70	1000	700	100	250	350
A100x80	1000	800	100	250	450
2P120x80	1200	800	100	350	450

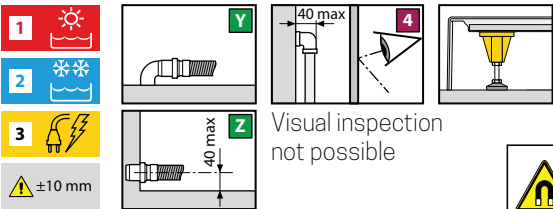

Visual inspection
not possible

WARNING!
It could be dangerous for
pacemaker wearer

HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance
with a multiple-pole switch with a minimum contact opening ≥ 3 mm.