







LINE 1

EQUIPPED PANEL IN ALUMINIUM - FOR WALL OR CORNER FITTING

Design Marco Pellici



Shower head 200x200 mm

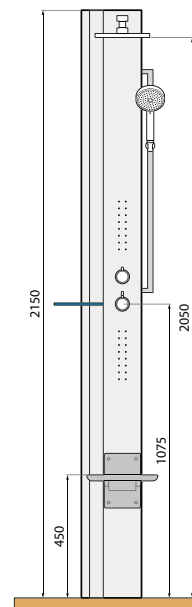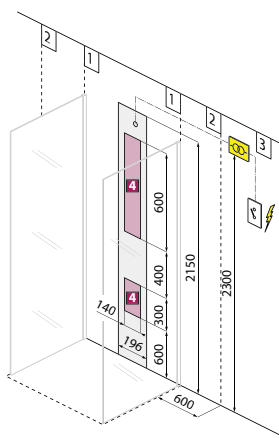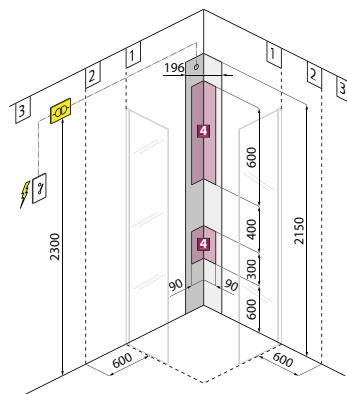

1 2 Water connections for wall mounted fittings




HYDRAULIC CHARACTERISTIC

- Optimum dynamic pressure 2÷5 bar
- 1/2" hot water connection
- Cold water connection 1/2"

ELECTRICAL CHARACTERISTIC

- Supply voltage 220-230 V
- Frequency 50/60 Hz
- Nominal power 25 W

These products must be fitted upstream with a 30 mA circuit breaker with a minimum contact of 3 mm manufactured under current legislation



Mixer	Dimensions (cm)	Code	Select the finishing / price							
			Matt white equipped panel		Soft black equipped panel		Silver chemical equipped panel		Silver equipped panel	
			FRONT DETAIL AND HOLDER FINISH		FRONT DETAIL AND HOLDER FINISH		FRONT DETAIL AND HOLDER FINISH		FRONT DETAIL AND HOLDER FINISH	
			UB	UN2	HJ	HN2	JH	BH	BU	
			Silver	Dove grey	Matt Silver	Dove grey	Matt Black	Matt Black	Matt White	
WITHOUT SEAT										
Manual	22 x 7,5 x H215	LINE1M-								
Thermostatic	22 x 7,5 x H215	LINE1T-								
HYDROMASSAGE										
			White seat		Matt black seat		Matt black seat	Matt black seat	White seat	
Manual	22 x 7,5 x H215	LINE1PVM-								
Thermostatic	22 x 7,5 x H215	LINE1PVT-								
LIGHT										
			White seat		Matt black seat		Matt black seat	Matt black seat	White seat	
Manual	22 x 7,5 x H215	LINE1PVML-								
Thermostatic	22 x 7,5 x H215	LINE1PVTL-								

Construction of the Code: **Code** + **Select the colour** = Final product Code